

Returns & Faulty Items

- If any problem is encountered during or after installation, please call the All LED technical department to get the problem resolved as soon as possible.
- Please do not just return the item to the outlet you purchased it from, as you are only entitled to a replacement or refund after the unit has undergone testing and the unit has been confirmed as having a manufacturing defect/fault. Your statutory rights are not affected.
- The manufacturer will not be deemed liable or held responsible for any damages caused by faults or manufacturing defects that may be present in any of its products or the misuse or incorrect installation of this device. Please refer to our troubleshooting guide for further information.
- All goods are supplied under the terms and conditions of All LED LTD, a copy of which may be obtained upon written request.



INSTALLATION GUIDE



AiQ/STRIP/REC Smart-S - LED Strip Controller (Single Colour, Trilogy - CCT, RGB, RGBWW+CW)

Technical Specifications

Product Code	AiQ/STRIP/REC
Operating Voltage (V)	12-24VDC
Max Output Power (W)	(48-96W)x5CH
Output Current (Max)	4Ax5CH
Output Voltage (Max)	12-24VDC
Efficiency %	99%
Network Standby Power (W)	0.24W
Class	III
Body Material	White Polymer
Ingress Protection	IP20
Ambient Operating Temperature (°C)	-20°C ~ +50°C
Guarantee	5 Years
Output type	Constant Voltage



ALL LED LTD
42 Sedgwick Road,
Luton, LU4 9DT

www.allledgroup.com
sales@allledgroup.com
Tel: +44 (0)208 841 9000

Environmental Protection
Waste electrical products should
not be disposed of with household
waste. Please recycle where
facilities exist. Check with your
Local Authority or retailer for
recycling advice



The manufacturer will not be deemed liable or held responsible for any damages caused by faults or manufacturing defects that may be present in any of its products or the misuse or incorrect installation of this device
Your statutory rights are not affected.



Pairing Instructions:

Initial programming of an entire system can be done as simply as: Fusebox Lighting Breaker OFF (5 Seconds), then ON.

Say “Alexa, add a device” or search on relevant app.

After the device has been added to a network successfully, a 3 minute window will open for find and bind (for remotes)

Network Mode: 60 Seconds

Find and Bind (for remotes): 3 Minutes

If the 1 minute window elapses, simply switch the module on and off. It will enter network pairing mode again.

Network Pairing Mode:

This will automatically happen when the product is first switched on.

This mode enables the user to connect the smart module to a network hub/gateway. This mode will last 1 minute or until a connection has been established. If successful, the lights will flash. Once the time limit has elapsed, the module will go into a normal state, with a 3 minute window to pair any remotes. Once added to a network, the module must be factory reset if the network must be changed.

Find and Bind Pairing Mode (Remote Control):

Note: If using the items on a smart device, you MUST pair the module and remote to the hub PRIOR to pairing with any remote control.

if using the module directly with a remote, you may proceed as below.

To set to this mode, toggle the power (Care Note on Discharge Timings) 4 times

From ON - OFF>ON>OFF>ON>OFF>ON>OFF>ON

Or push the program button on the module 4 times.

The pairing mode enables the user to connect or to disconnect from a remote device such as a handheld remote. The mode will last 3 minutes. If successful, the lights will flash.

Factory Reset:


To set to this mode, toggle the power (Care Note on Discharge Timings) 7 times

From ON - OFF>ON>OFF>ON>OFF>ON>OFF>ON>OFF>ON>OFF>ON>OFF>ON>OFF>ON

Or push the program button on the module 7 times.

Factory reset mode will remove all paired connections to the module. If successful, the lights will flash. After the reset has completed the module automatically goes into network pairing mode.

Dimensions

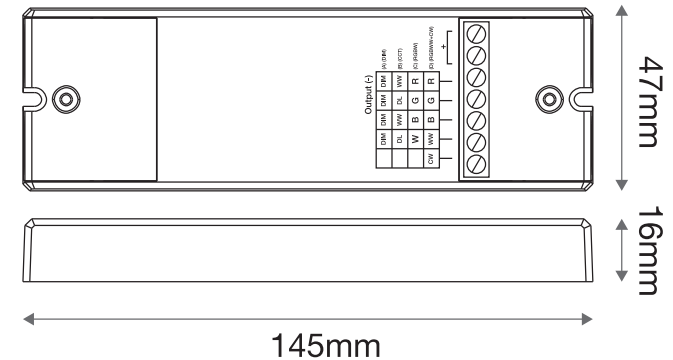

General Information

- Interference may occur with other products on the same frequency of 2.4Ghz
- Product may differ in colour from image on box
- Range signal can be reduced when using within materials such as concrete & metal

Dip Switch Settings

- | | | |
|--------------------------|--------------------------|-------------------|
| 1 | 2 | Single Colour (A) |
| <input type="checkbox"/> | <input type="checkbox"/> | CCT (B) |
| <input type="checkbox"/> | <input type="checkbox"/> | RGB(W) (C) |
| <input type="checkbox"/> | <input type="checkbox"/> | RGBWW+CW (D) |