



AiQ/DALI/0/1-10V

Smart-DALI - DALI 0/1-10V Signal Generator & Relay

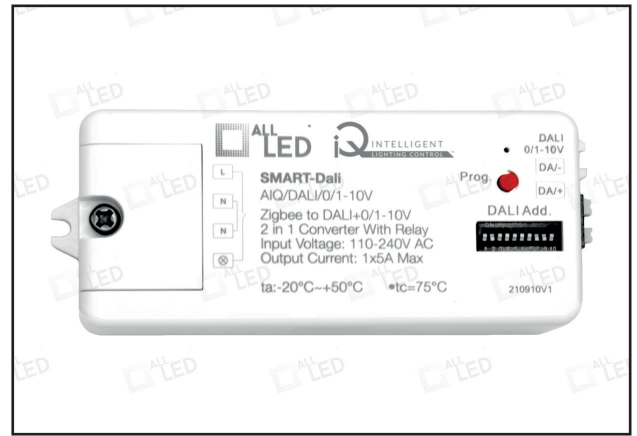

PRODUCT FEATURES

- DALI 0/1-10V Converter
- Creates & Converts Smart Signals Into DALI Or 0/1-10V Signals
- Compatible With All iQ Devices
- DALI Addressable And Able To Be Grouped
- DALI Broadcast Mode
- RGBW & CCT DALI Control Output
- Can Be Used With Or Without Inbuilt Relay
- For 0/1-10V Simply Set DIP Switch 10 To Down
- Can Be Used Independently Or In Conjunction With A Smart Hub*

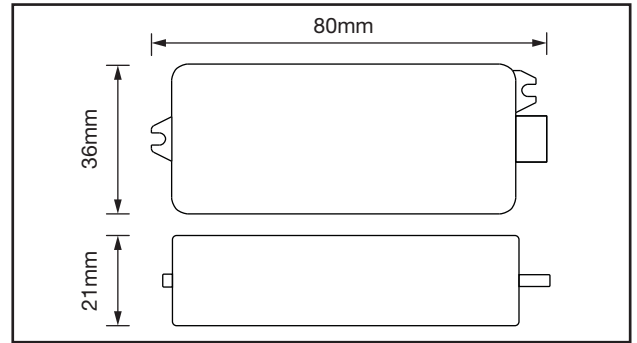

TECHNICAL SPECIFICATIONS

PRODUCT CODE	AiQ/DALI/0/1-10V	
Input	Power	110-240 VAC
	Transmission Frequency	Zigbee 2.4GHz
Output, DALI	DALI PS Current	Max. 50mA
	DALI Current Consumption	Max 4mA
Output, 0/1-10V	Current	Max. 20mA
Output, Relay	Switching Voltage	110-240VAC
	Current	Max. 5A
Environment	Operating Temperature	-20°C ~ +50°C
	Relative Humidity	8% to 80%

