


AST720F

7.2W/m IP20 LED Strip, 24V

PRO-FLEX™

PRODUCT FEATURES

- 40m Reel Or Bespoke Lengths
- Designed For Corners & Complex Shapes
- Designed To Bend On Horizontal Surfaces
- 100mm Cut Point Intervals
- Soldered Connection Only
- High Output, Compact Light Source
- 60 LEDs/m
- Customised Bespoke Service Available

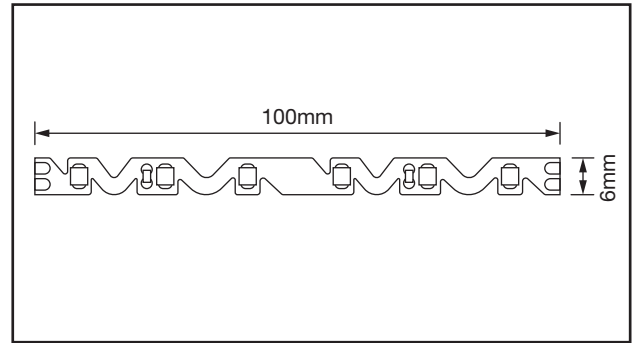

TECHNICAL SPECIFICATIONS

PRODUCT RANGE	AST720F/27	AST720F/30	AST720F/40	AST720F/60
Rated Power	7.2W/m	7.2W/m	7.2W/m	7.2W/m
Cut Points	100mm	100mm	100mm	100mm
PCB Width	6mm	6mm	6mm	6mm
Lumens	≤790lm/m	≤800lm/m	≤850lm/m	≤870lm/m
Ingress Protection	IP20	IP20	IP20	IP20
Peak Intensity	239cd	244cd	252cd	271cd
Switching Cycle	>15,000	>15,000	>15,000	>15,000
Lifetime	30,000 Hrs	30,000 Hrs	30,000 Hrs	30,000 Hrs
CRI	≥80	≥80	≥80	≥80
Beam Angle	120°	120°	120°	120°
SCDM	<6	<6	<6	<6
LED/m	60 LED/m	60 LED/m	60 LED/m	60 LED/m
CCT	2700K	3000K	4000K	6000K
Ambient Operating Temperature	-30°C ~ 45°C	-30°C ~ 45°C	-30°C ~ 45°C	-30°C ~ 45°C
Reel Size	40m	40m	40m	40m

DC
24V

VERY WARM WHITE
2700K

WARM WHITE
3000K

COOL WHITE
4000K

BRIGHT DAY LIGHT
6000K

IP20

120°

30,000H

240V AC

SMD LED

≤870lm

7.2W

CLASS 3

INDOORS ONLY

DIMMABLE WITH DRIVER

2 YEAR GUARANTEE