
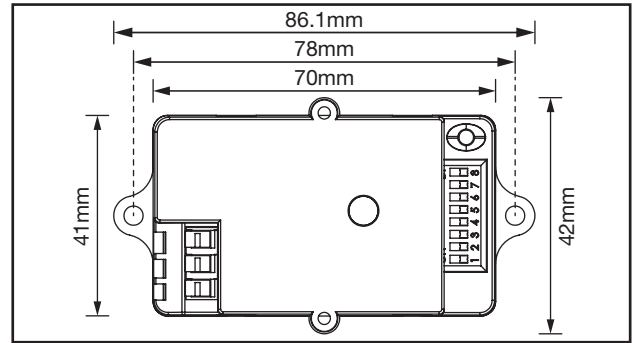


AMS001

Fully Programmable Microwave Sensor



PRODUCT FEATURES

- Microwave Sensor
- Suitable For Use With LEDs
- Low Load Switching Capacity
- In-Built Lux Sensor
- 5.8Ghz Frequency
- Push Fit Terminals
- Adjustable Detection Range
- Adjustable Lux Range
- Adjustable Timer Function

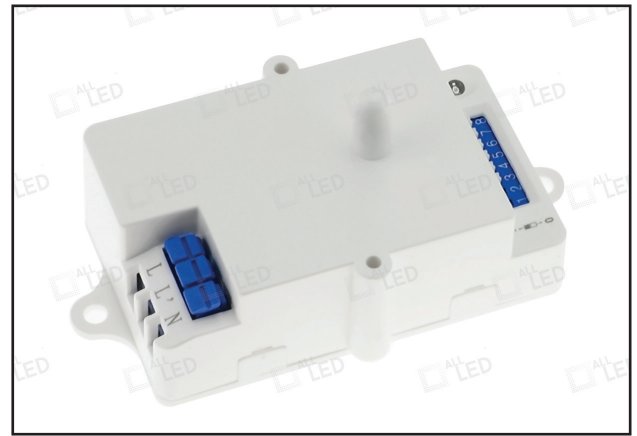


TECHNICAL SPECIFICATIONS


PRODUCT CODE	AMS001
Operating Voltage	220-240 VAC
Frequency	50/60 Hz
Transmission Power	<0.2mW
Beam Angle	360°
Power	0.5W
Operating Temperature	-15°C~+60°C

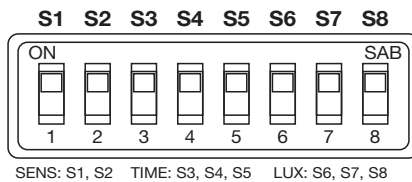


S1	S2	Detection Range
0	0	2m
0	1	5m
1	0	8m
1	1	10m




S3	S4	S5	Time
0	0	0	10s
0	0	1	1min
0	1	0	5 min
0	1	1	10 min
1	0	0	15 min
1	0	1	20 min
1	1	0	25 min
1	1	1	30 min




S6	S7	S8	LUX
0	0	0	24H
0	0	1	10 LUX
0	1	0	20 LUX
0	1	1	50 LUX
1	0	0	100 LUX
1	0	1	200 LUX
1	1	0	300 LUX
1	1	1	500 LUX



Height of Installation
2.5~3.5m



(Height of Installation 2.5m)
Detection Range



Detection Angle

