


AST720F/IP

7.2W/m IP65 LED Strip, 24V

PRO-FLEX™

PRODUCT FEATURES

- 30m Reel Or Bespoke Lengths
- Designed For Corners & Complex Shapes
- Designed To Bend On Horizontal Surfaces
- 100mm Cut Point Intervals
- Soldered Connection Only
- High Output, Compact Light Source
- 60 LEDs/m
- Customised Bespoke Service Available

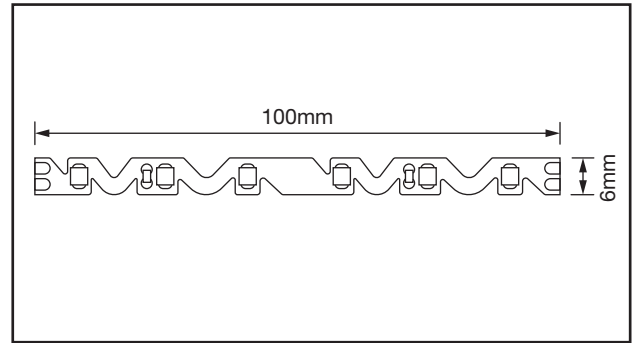

TECHNICAL SPECIFICATIONS

PRODUCT RANGE	AST720FIP/27	AST720FIP/30	AST720FIP/40	AST720FIP/60
Rated Power	7.2W/m	7.2W/m	7.2W/m	7.2W/m
Cut Points	100mm	100mm	100mm	100mm
PCB Width	6mm	6mm	6mm	6mm
Lumens	≤675lm/m	≤705lm/m	≤909lm/m	≤770lm/m
Ingress Protection	IP65	IP65	IP65	IP65
Peak Intensity	221cd	226cd	233cd	256cd
Switching Cycle	>15,000	>15,000	>15,000	>15,000
Lifetime	30,000Hrs	30,000Hrs	30,000Hrs	30,000Hrs
CRI	≥80	≥80	≥80	≥80
Beam Angle	120°	120°	120°	120°
SCDM	<6	<6	<6	<6
LED/m	60 LED/m	60 LED/m	60 LED/m	60 LED/m
CCT	2700K	3000K	4000K	6000K
Ambient Operating Temperature	-30°C ~ 45°C	-30°C ~ 45°C	-30°C ~ 45°C	-30°C ~ 45°C
Reel Size	30m	30m	30m	30m

DC
24V

VERY WARM WHITE
2700K

WARM WHITE
3000K

COOL WHITE
4000K

BRIGHT DAY LIGHT
6000K

IP65

120°

30,000H

240V AC

SMD LED

≤909lm

7.2W

CLASS 3

INDOORS ONLY

DIMMABLE WITH DRIVER

2 YEAR GUARANTEE