


ABHW12/CCT

12W LED IP65 IK08 Coastal Wall And Ceiling CCT Selectable Bulkhead



PRODUCT FEATURES

- IP65 Rating
- IK08 High Impact Durable Polycarbonate Housing
- CCT Selectable (3000K/4000K/6000K)
- Wall And Ceiling Mounting
- Loop In Loop Out Pre-Moulded Cable Entries
- Black And White Standard Trims Included
- Additional Decorative Trims Available*
- Polycarbonate Body Ideal For Coastal Applications

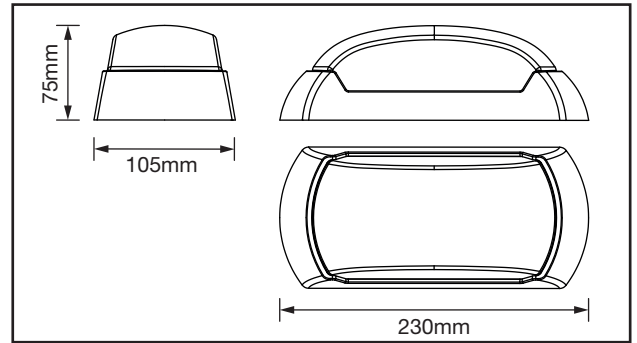

TECHNICAL SPECIFICATIONS

Product Code	ABHW12/CCT		
Luminous Flux (LM)	810lm	1050lm	920lm
Useful Luminous Flux (LM)	810lm	1050lm	920lm
CCT (Kelvin)	3000K	4000K	6000K
Peak Intensity	153	196	171
CRI		>80	
Beam Angle (°)		160°	
Operating Voltage (AC)		220-240V AC	
Max Output Power		12W	
Operating Current (A max)		0.07A	
Standby Power (W)		≤0.5W	
Class		II	
Body Material		Polycarbonate	
Frame Colour		White	
Switching Cycles		50,000	
Ingress Protection		IP65	
Ambient Operating Temperature (°C)		-20°C ~ +45°C	
Input Frequency (Hz)		50/60Hz	
Guarantee		3 Years	
Lifetime (L70 B50)		50,000 Hrs	
IK Rating		IK08	
Displacement Factor		≥0.7	
Flicker Metric (PstLM)		<1	
Stroboscopic Effect Metric (SVM)		<0.4	



Black Decorative Trim Pack*
ABHW12BZ/BK



White Decorative Trim Pack*
ABHW12BZ/WH



*Sold Separately